

SUBMITTAL DATA SHEET

20 RT (Y,H)VAHP240B41S (Consists of one (Y,H)VAHP096B41S and two (Y,H)VAHP072B41S modules.)

Job Name:		Location:	
Purchaser:		Order No.:	
Engineer:			
Submitted To:	For:	Ref:	Approval:
Submitted By:		Date:	
Unit Designation:		Schedule No.:	Model No.:

FEATURES:

- Two-pipe system for ductless and ducted applications
- Inverter-driven scroll compressor
- Long refrigerant piping lengths – up to 3,280 feet total pipe run

ACCESSORIES:

- Piping Kit: for details see Pipe Accessories Submittal
- Hail/Snow Protection Hood: for details see Snow/Hail Guards Kit Submittal

NOTES:

1. Rating Conditions are shown as below with piping length 24 feet 7-3/16 inch, piping height 0 feet.
 - Cooling
Indoor Air Inlet Temperature: 80 DB, 67F WB
Outdoor Air Inlet Temperature: 95F DB
 - Heating
Indoor Air Inlet Temperature: 70 F DB
Outdoor Air Inlet Temperature: 47F DB, 43F WB
2. Rating Conditions are based on the AHRI 1230 test standard.
3. For more details, please refer to Engineering manual "Operation range" section.
4. For more details, please refer to Engineering manual "Operation range" section.
5. External static pressure can be changed via DSW setting 0.24 in.W.G. (60Pa).

Category		Ton		20RT (8RT+6RT+6RT)	
Model (combination)				(H,Y)VAHP240B41S	
Model (individual)		Unit A		(H,Y)VAHP096B41S	
		Unit B		(H,Y)VAHP072B41S	
		Unit C		(H,Y)VAHP072B41S	
		Unit D		-	
Power Supply				460V/ 3PH 60Hz	
Capacity (Nominal) ¹	Cooling	Capacity (Nominal)	Btu/h	(kW)	240,000 (70.3)
		Power input	kW		19.77
		Current input	A		27.6
	Heating	Capacity (Nominal)	Btu/h	(kW)	270,000 (79.1)
		Power input	kW		19.19
		Current input	A		27.7
Efficiency Ratings ²	Cooling	Capacity (Rated)	Btu/h	(kW)	228,000 (66.9)
		EER	Btu/Wh	(W/W)	10.90 (3.20)
		IEER	Btu/Wh	(Wh/Wh)	19.80 (5.81)
	Heating High	Capacity (Rated)	Btu/h	(kW)	258,000 (75.7)
		COP	W/W		3.68
	Heating Low	Capacity	Btu/h	(kW)	182,000 (53.4)
COP		W/W		2.32	
Cooling Operating Range	Indoor	°F WB	(°C WB)	59(15)~73(23)	
	Outdoor ³	°F DB	(°C DB)	14(-10)~118(48)	
Heating Operating Range	Indoor	°F DB	(°C DB)	59(15)~80(27)	
	Outdoor ⁴	°F WB	(°C WB)	-4(-20)~59(15)	
Cabinet Color (Munsell Code)				2.5Y 8/2	
Outer Dimensions (H x W x D)		in		68-1/8 x 37-7/8 x 31-7/32 x 3	
Package Dimensions (H x W x D)		in		74-1/4 x 40-5/8 x 34-1/32 x 3	
Weight	Net	lbs	(kg)	2009 (911)	
	Gross	lbs	(kg)	2159 (979)	
Connection Ratio	Total Indoor Unit Capacity	%		150 - 70	
	Max. (Recommendation) indoor units/system			60(38)	
Heat Exchanger	Type			Multi-Pass Cross-Finned Tube	
	Material			Cu-Al (Anti-corrosion)	
Compressor	Type	Inverter			DA65PHD×3
		Fixed Speed			DA65PHC×1
	Motor Output (Pole)	kW (Pole)		4.8(6)+4.4(2)	
				7.26(6) 7.26(6)	
	Start Method			inverter	
	Operation Range	%		6~100	
Refrigeration Oil Type			FVC68D		
Crank Case Heater	W×Q'ty		40.8(230V)×8		
Fan	Type			Propeller Fan	
	Motor Output (Pole)	kW (Pole)		0.66(8)+0.49(8)×2	
	Quantity	Q'ty		3	
	Air Flow Rate	cfm	(m ³ /min)	6884+6178 (195+175)	
				+6178	
	External static pressure ⁵	in.WG	(Pa)	0 (0)	
Drive			Direct-drive		
Electrical	Min Circuit Amps	A		-	
	Recommended Fuse/Breaker Size	A		-	
	Maximum Fuse Size	A		-	
Sound Pressure Level	Cooling (Night-Shift)	dB(A)		66 (61)	
	Heating	dB(A)		66	
Protection devices	Cycle			High pressure switch at 601psi (4.15MPa)	
	Inverter			Over-current protection	
	Compressor			Over-heat protection	
	PCB			Over-current protection	
Refrigerant	Type			R410A	
	Charge amount	lbs	(kg)	18.7+16.1 (8.5+7.3) +16.1 (7.3)	
Refrigeration Oil	Charge amount	gal/Unit	(ℓ/Unit)	2.1+1.6+1.6 (7.9+6.0) +6.0	
Defrost Method			Reversed Refrigerant cycle		
Main Refrigerant Piping (Heat Pump)	High/Low Pressure Gas Line	in	(mm)	1-5/8 (41.28)	
	Liquid Line	in	(mm)	3/4 (19.05)	

version 201702

System Dimensions


Heat Pump Type

Model: (Y,H)VAHP240B41S

version 201702

Piping Connection Dimensions

Unit: inch (mm)

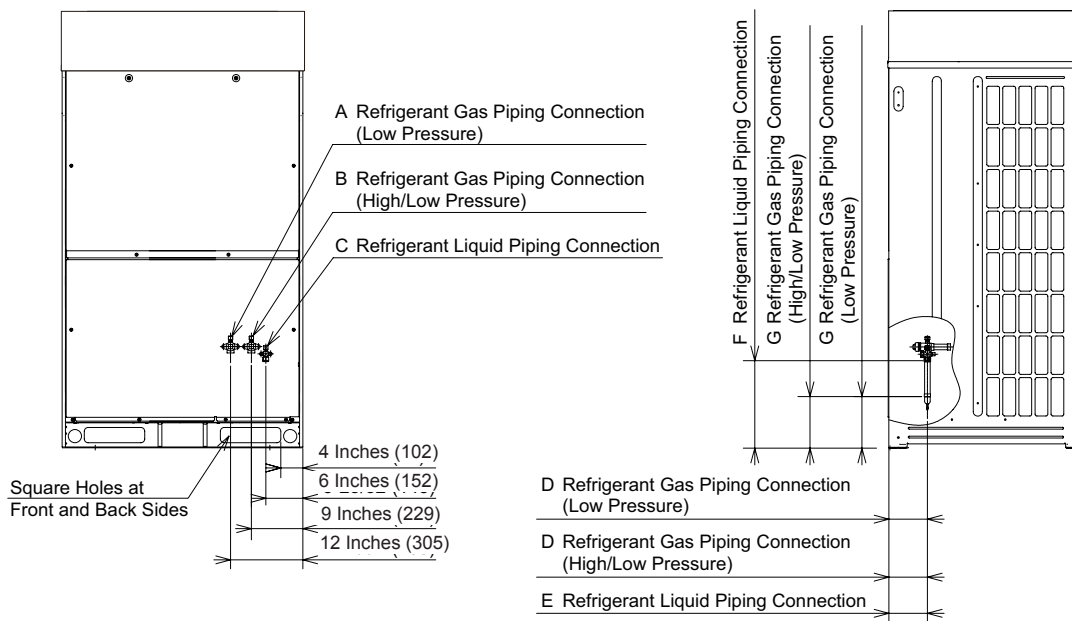

Model Type	Field Piping (*)					A	B	C	D	E	F	G
	Heat Recovery System		Heat Pump System		Liquid							
	Low Pressure Gas	High/Low Pressure Gas	Low Pressure Gas	High/Low Pressure Gas								
72	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	7/8 (22.2)	7/8 (22.2)	3/8 (9.52)	5-29/32 (150)	5-29/32 (150)	13-3/8 (340)	8-1/16 (205)
96	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	1 (25.4)	1 (25.4)	1/2 (12.7)	6-11/16 (170)	6-11/16 (170)	12-25/32 (325)	7-7/8 (200)
120	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	1 (25.4)	1 (25.4)	1/2 (12.7)	6-11/16 (170)	6-11/16 (170)	12-25/32 (325)	7-7/8 (200)

*Using the accessory pipe (refer to Table 3.6 "Factory-Supplied Accessories"), combine the piping size.

Figure 6.2 Refrigerant Piping Connection

version 201702

