

SUBMITTAL DATA SHEET

18 RT (H,Y)VAHR216B41S (Consists of three (H,Y)VAHR072B41S modules.)

Job Name:			Location:		
Purchaser:			Order No.:		
Engineer:					
Submitted To:	For:	Ref:	Approval:	Construction:	
Submitted By:			Date:		
Unit Designation:			Schedule No.:		Model No.:

FEATURES:

- Three-pipe system for ductless and ducted applications
- Inverter-driven scroll compressor
- Air source simultaneous cooling and heating with Change-Over Box
- Long refrigerant piping lengths – up to 3,280 feet total pipe run

ACCESSORIES:

- Change-Over Box (required for a heat recovery system): for details see Change-Over Box Submittals
- Piping Kit: for details see Pipe Accessories Submittal
- Hail/Snow Protection Hood: for details see Snow/Hail Guards Kit Submittal

NOTES:


- Rating Conditions are shown as below with piping length 24 feet 7-3/16 inch, piping height 0 feet.
Cooling
Indoor Air Inlet Temperature: 80 DB, 67F WB
Outdoor Air Inlet Temperature: 95F DB
Heating
Indoor Air Inlet Temperature: 70 F DB
Outdoor Air Inlet Temperature: 47F DB, 43F WB
- Rating Conditions are based on the AHRI 1230 test standard.
- For more details, please refer to Engineering manual "Operation range" section.
- For more details, please refer to Engineering manual "Operation range" section.
- External static pressure can be changed via DSW setting 0.24 in.W.G. (60Pa).

Category		Ton		18RT (6RT+6RT+6RT)	
Model (combination)			(H,Y)VAHR216B41S		
Model (individual)		Unit A	(H,Y)VAHR072B41S		
		Unit B	(H,Y)VAHR072B41S		
		Unit C	(H,Y)VAHR072B41S		
		Unit D	-		
Power Supply			460V/ 3PH 60Hz		
Capacity (Nominal) ¹	Cooling	Capacity (Nominal)	Btu/h	(kW)	216,000 (63.3)
		Power input	kW		18.24
		Current input	A		25.5
	Heating	Capacity (Nominal)	Btu/h	(kW)	243,000 (71.2)
		Power input	kW		17.79
		Current input	A		24.9
Efficiency Ratings ²	Cooling	Capacity (Rated)	Btu/h	(kW)	206,000 (60.4)
		EER	Btu/Wh	(W/W)	10.60 (3.11)
		IEER	Btu/Wh	(Wh/Wh)	18.80 (5.51)
	Heating Hight	Capacity (Rated)	Btu/h	(kW)	232,000 (68.1)
		COP	W/W		3.32
	Heating Low	Capacity	Btu/h	(kW)	164,000 (48.1)
		COP	W/W		2.23
	Heat Recovery	SCHE	Btu/Wh		25.10
Cooling Operating Range	Indoor	°F WB (°C WB)		59(15)~73(23)	
	Outdoor ³	°F DB (°C DB)		14(-10)~118(48)	
Heating Operating Range	Indoor	°F DB (°C DB)		59(15)~80(27)	
	Outdoor ⁴	°F WB (°C WB)		-4(-20)~59(15)	
Cabinet Color (Munsell Code)			-		2.5Y 8/2
Outer Dimensions (H x W x D)			in		(68-1/8 x 37-7/8 x 31-7/32) x 3
Package Dimensions (H x W x D)			in		(74-1/4 x 40-5/8 x 34-1/32) x 3
Weight	Net	lbs		(kg)	1819 (825)
	Gross	lbs		(kg)	1958 (888)
Connection Ratio	Total Indoor Unit Capacity		%		150 - 70
	Max. (Recommendation) indoor units/system		-		54 (32)
Heat Exchanger	Type	-		Multi-Pass Cross-Finned Tube	
	Material	-		Cu-Al (Anti-corrosion)	
Compressor	Type	Inverter		DA65PHD×3	
		Fixed Speed		-	
	Motor Output (Pole)	kW (Pole)		7.26(6) 7.26(6) 7.26(6)	
		Start Method		-	
	Operation Range		%		7~100
	Refrigeration Oil Type		-		FVC68D
Crank Case Heater			W×Q×ty		40.8 (230V) ×6
Fan	Type	-		Propeller Fan	
	Motor Output (Pole)	kW (Pole)		0.49(8)×3	
	Quantity	Q'ty		3	
	Air Flow Rate	cfm	(m³/min)	6178+6178+6178	(175+175+175)
	External static pressure ⁵	in.WG	(Pa)	0 (0)	
Electrical	Drive	-		Direct-drive	
	Min Circuit Amps	A		-	
	Recommended Fuse/Breaker Size	A		-	
Sound Pressure Level	Maximum Fuse Size	A		-	
	Cooling (Night-Shift)	dB(A)		65	(60)
	Heating	dB(A)		65	
	Protection devices	Cycle	-		High pressure switch at 601psi (4.15MPa)
Inverter		-		Over-current protection	
Compressor		-		Over-heat protection	
PCB		-		Over-current protection	
Refrigerant	Type	-		R410A	
	Charge amount	lbs	(kg)	16.1+16.1+16.1	(7.3+7.3+7.3)
Refrigeration Oil	Charge amount	gal/Unit	(ℓ/Unit)	1.6+1.6+1.6	(6.0+6.0+6.0)
Defrost Method			-		Reversed Refrigerant cycle
Main Refrigerant Piping (Heat Recovery)	Low Pressure Gas Line	in	(mm)	1-3/8	(34.93)
	High/Low Pressure Gas Line	in	(mm)	1-1/8	(28.58)
	Liquid Line	in	(mm)	3/4	(19.05)

version 201611

System Dimensions

Heat Recovery Type Model:
(H,Y)VAHR216B41S

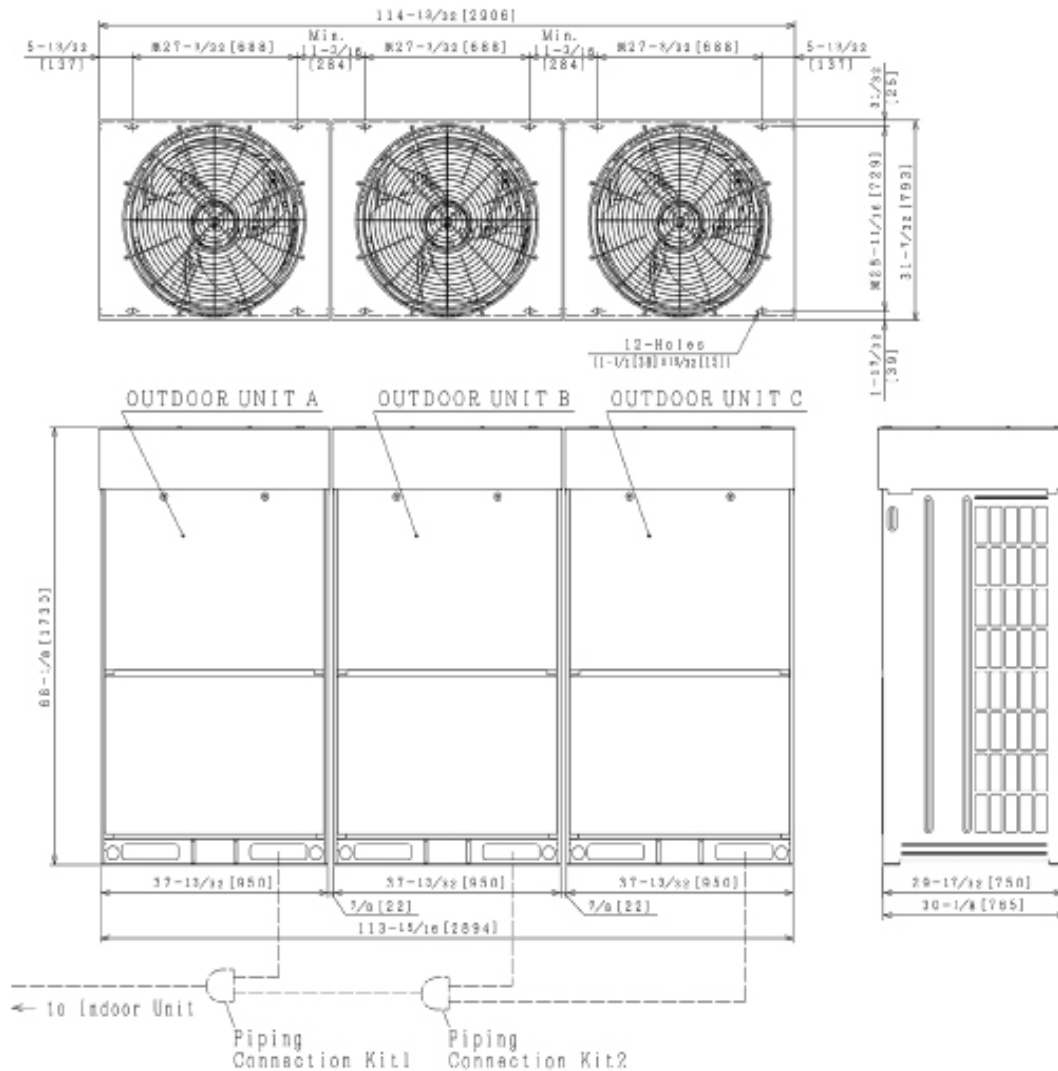

NOTES:


1. Make sure that the outdoor unit A is placed on the indoor unit side.
Arrange the outdoor units according to the capacity, A<B<C.
2. Check "Installation Manual" for the piping connection kit and piping connection size.
3. This drawing shows that there is 1/8 inch [22mm] clearance between the base units.
In case of the outdoor unit with "Snow Protection Hood (Optional Parts)" or "Air Outlet Duct (Field-Supplied)", the clearance between the base units of more than 1-31/32 inch [50mm] is required.
4. The dimensions marked with M indicates the mounting pitch dimension for anchor bolts.
5. The width of outer dimension and anchor bolt mounting position are changed by clearance between the base units.

Outdoor Unit Model	Combination of Base Unit Models		
	OUTDOOR UNIT A	OUTDOOR UNIT B	OUTDOOR UNIT C
(H, Y) VAHR216B31S	(H, Y) VAHR072B31S	(H, Y) VAHR072B31S	(H, Y) VAHR072B31S
(H, Y) VAHR216B41S	(H, Y) VAHR072B41S	(H, Y) VAHR072B41S	(H, Y) VAHR072B41S

version 201611

Piping Connection Dimensions

Unit: inch (mm)

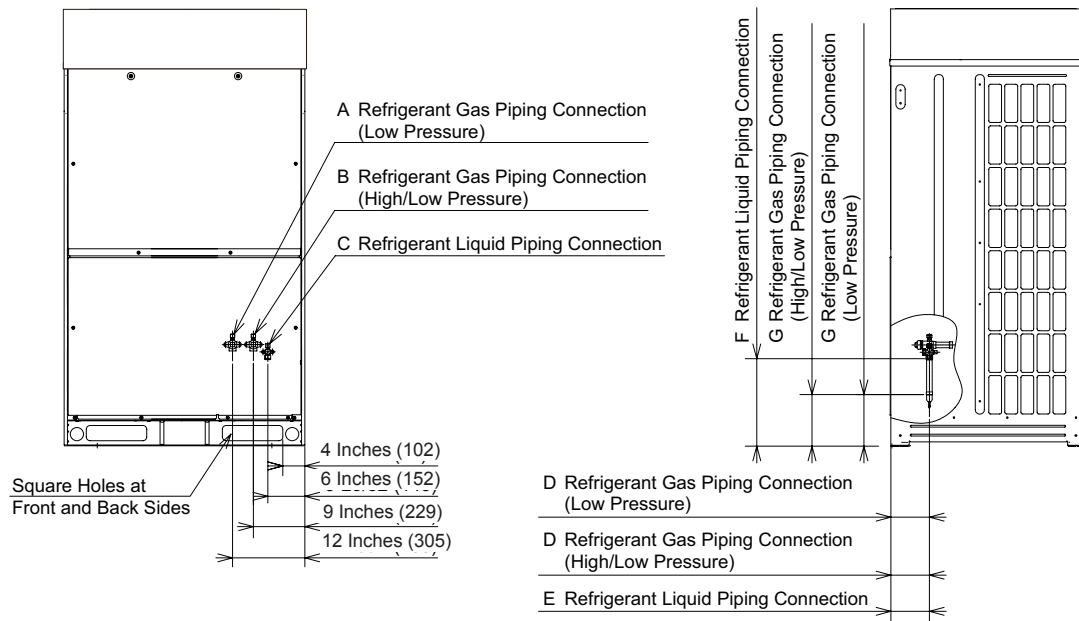

Model Type	Field Piping (*)					A	B	C	D	E	F	G
	Heat Recovery System		Heat Pump System		Liquid							
	Low Pressure Gas	High/ Low Pressure Gas	Low Pressure Gas	High/ Low Pressure Gas								
72	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	7/8 (22.2)	7/8 (22.2)	3/8 (9.52)	5-29/32 (150)	5-29/32 (150)	13-3/8 (340)	8-1/16 (205)
96	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	1 (25.4)	1 (25.4)	1/2 (12.7)	6-11/16 (170)	6-11/16 (170)	12-25/32 (325)	7-7/8 (200)
120	1-1/8 (28.58)	7/8 (22.2)	-	1-1/8 (28.58)	1/2 (12.7)	1 (25.4)	1 (25.4)	1/2 (12.7)	6-11/16 (170)	6-11/16 (170)	12-25/32 (325)	7-7/8 (200)

*Using the accessory pipe (refer to Table 3.6 "Factory-Supplied Accessories"), combine the piping size.

Figure 6.2 Refrigerant Piping Connection

version 201611

