

Installation Manual for 3P Connector Cable

Model	PCC-1A
-------	--------


1. Contents of 3P Connector Cable

XARP-03V is the model number of the housing used for 3P Connector Cable.
 Please check the connection port of PCB by referring to the service manual before use.
 The maximum cable length is 164ft (50m) with a diameter of 0.3~0.5mm² (AWG22).


No.	Name	Qty.
1	3P Connector Cable	5 sets
2	Close End Terminal (JST CE-100)	15
3	Securing Band	5
4	Insulation Tape	1

2. How to Use

- (1) There are three cables. If one of the three is not used depending on the purpose, check the connector numbers and cut the cable. Then cover the cut surface with insulation tape.

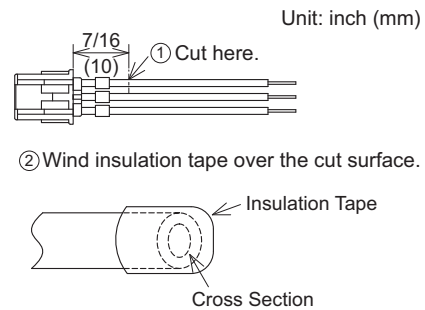

- (2) In an instance where a relay or timer relay is connected with field-supplied cable (use method ① or ②).

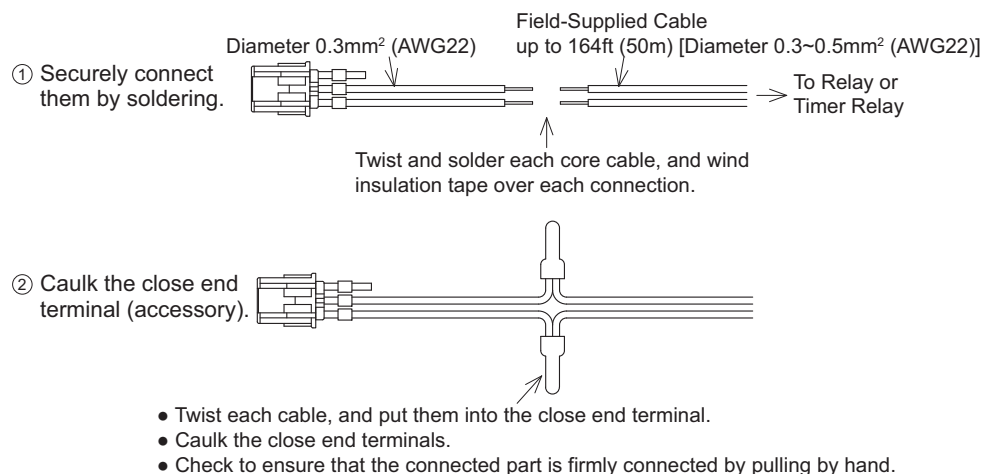

(3) Caution when Wiring

Make sure that the field-supplied cable runs more than 6 in. (150mm) away from a power cable higher than 100V. (Crossing cables is okay.)

If the cable runs along the power cable, use shielded cable and connect one end to earth ground.