

MW Indoor units

## SUBMITTAL DATA SHEET

<b>DHMW12NDB21S</b>			<b>12,000 BTU/H Multi-Zone Ducted unit</b>		
<b>Job Name:</b>			<b>System Location:</b>		
<b>Purchaser:</b>			<b>Order No.:</b>		
<b>Engineer:</b>					
<b>Submitted To:</b>		<b>For:</b>	<b>Ref:</b>	<b>Approval:</b>	
<b>Submitted By:</b>		<b>Date:</b>		<b>Construction:</b>	
<b>Unit Designation:</b>			<b>Schedule No.:</b>		<b>Model No.:</b>

### FEATURES

- Internal condensate drain pump
- Wired controller
- Coil Fin Coating



DHMW12NDB21S

### ACCESSORIES

- Wired Central Controller, DCCRMW
- Wired Zone Controller, DWUNI



DWUNI  
(Optional)



DWCMW  
(Standard)




DCCRMW  
(Optional)


Indoor Model Number	DHMW12NDB21S	
System Type	Heat Pump	
Nominal Capacity- Cooling	Btu/h	11,976
Nominal Capacity- Heating	Btu/h	13,140
Rated Voltage	V-PH-Hz	208/230-1-60
Airflow High to Low	CFM	394/235/177
Sound Pressure Level High to Low	dB(A)	40/38/36
Unit Dimension (WxDxH)	in. (mm)	27.55X24.21X7.87(700X615X200)
Net/Gross Weight	lbs (kg)	50.7/63.93(23/29)
Piping Connection Diameter - Liquid	(OD) in.	1/4
Piping Connection Diameter - Gas	(OD) in.	3/8
Piping Connection Diameter - Drain	(OD) in.	1
External Static Pressure	(in w.g)	0-0.04



## DHMW12NDB21S FAN CURVE

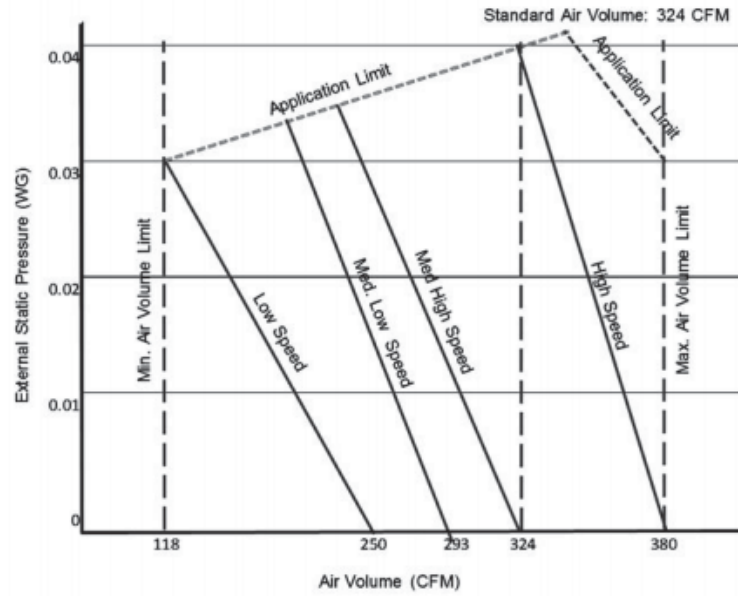

## DHMW12NDB21S Unit Dimensions

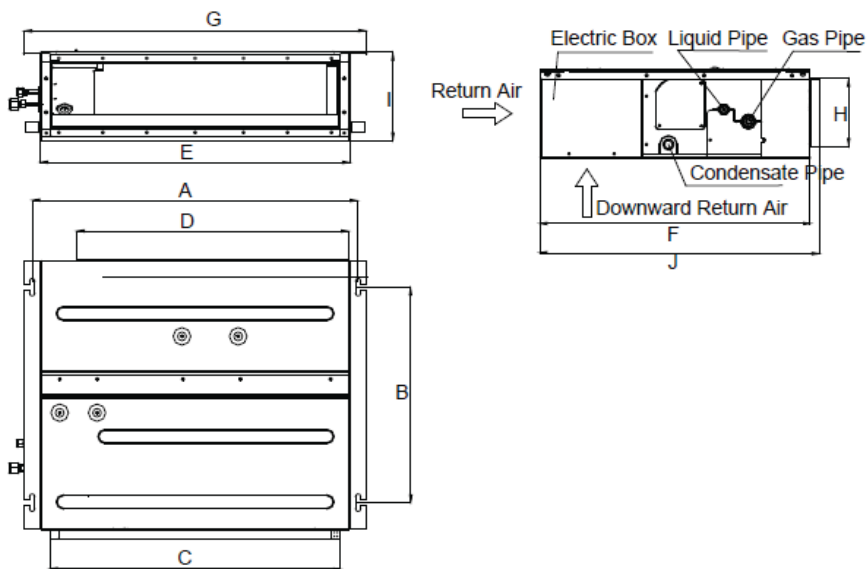

Unit: inch

Dimensions	
A	29 1/8
B	19 1/8
C	26 1/16
D	24 1/8
E	27 1/8
F	24 1/8
G	30 1/8
H	6 1/8
I	7 7/8
J	25